


Rozmery

Dimensions

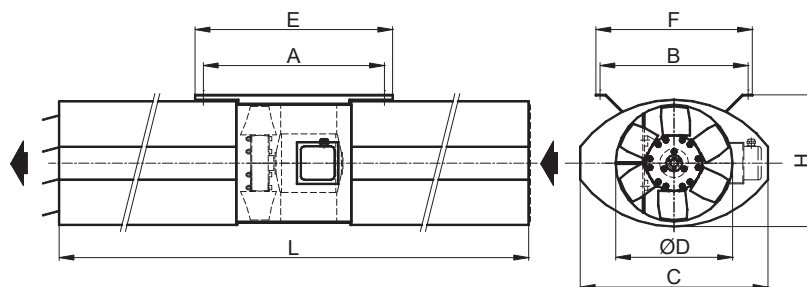

Veľkosť / Size	ØD	A	B	C	E	F	H	L
315	315	500	450	500	550	480	345	1350
355	355	550	500	560	600	530	385	1750
400	400	640	580	640	700	610	435	2000

Technické údaje

Technical data

1-smerné / Unidirectional

Typ Type	Ťah. sila Thrust N	Prietok Air flow m ³ /h	Výkon motora Motor power kW	n _{EM} min ⁻¹	Nom. prúd Nom. current A	Rozbeh. prúd Start current A	L _{pA} ** dB(A)	Hmot Weight kg
AVJ 315 – 2/4	28 / 6	4850 / 2250	0,70 / 0,18	2875 / 1410	2,05 / 0,77	11,3 / 2,70	58 / 43	50
AVJ 315 – 2	28	4850	0,75	2825	1,95	12,5	58	50
AVJ 355 – 2/4	45 / 11	7200 / 3600	1,50 / 0,37	2940 / 1460	4,80 / 1,4	30,5 / 7,00	65 / 47	80
AVJ 355 – 2	45	7200	1,50	2840	4,80	21,0	65	80
AVJ 400 – 2/4	55 / 14	8630 / 4430	1,50 / 0,37	2940 / 1460	4,80 / 1,4	30,5 / 7,00	66 / 41	94
AVJ 400 – 2	53	8630	1,50	2840	4,80	21,0	66	94
AVJ 400L – 2/4	65 / 16	10000 / 4650	2,00 / 0,50	2855 / 1445	5,10 / 1,6	33,00 / 7,20	69 / 52	100
AVJ 400L – 2	65	10000	2,20	2840	5,0	28,0	69	100

Typ Type	Ťah. sila Thrust N	Prietok Air flow m ³ /h	Výkon motora Motor power kW	n _{EM} min ⁻¹	Nom. prúd Nom. current A	Rozbeh. prúd Start current A	L _{pA} ** dB(A)	Hmot Weight kg
ODT AVJ 315 – 2/4	28 / 6	4850 / 2250	0,8 / 0,2	2820 / 1400	1,95 / 0,70	11,3 / 2,70	58 / 43	50
ODT AVJ 315 – 2	28	4850	0,75	2760	1,95	12,5	58	50
ODT AVJ 355 – 2/4	45 / 11	7200 / 3600	1,50 / 0,37	2875 / 1430	3,80 / 1,19	30,5 / 7,00	65 / 47	80
ODT AVJ 355 – 2	45	7200	1,50	2855	3,80	21,0	65	80
ODT AVJ 400 – 2/4	55 / 14	8630 / 4430	1,50 / 0,37	2875 / 1430	3,80 / 1,19	30,5 / 7,00	66 / 41	94
ODT AVJ 400 – 2	53	8630	1,50	2855	3,80	25,5	66	94
ODT AVJ 400L – 2/4	65 / 16	10000 / 4650	2,20 / 0,6	2845 / 1420	5,00 / 1,60	33,00 / 7,20	69 / 52	100
ODT AVJ 400L – 2	65	10000	2,20	2810	4,60	40,0	69	100

Teplotná trieda / Temperature class: **F200, F300, F400**

Reverzibilné / Reversible

Typ Type	Ťah. sila Thrust N	Prietok Air flow m ³ /h	Výkon motora Motor power kW	n _{EM} min ⁻¹	Nom. prúd Nom. current A	Rozbeh. prúd Start current A	L _{pA} ** dB(A)	Hmot Weight kg
AVJ-R 315 – 2/4	20 / 5	4190 / 2095	0,7 / 0,18	2875 / 1410	2,05 / 0,77	11,3 / 2,70	55 / 40	52
AVJ-R 315 – 2	20	4190	0,75	2825	1,95	12,5	55	55
AVJ-R 355 – 2/4	38 / 9	6360 / 3180	1,50 / 0,37	2940 / 1460	4,80 / 1,4	30,5 / 7,00	61 / 43	82
AVJ-R 355 – 2	38	6360	1,50	2840	4,80	21,0	61	82
AVJ-R 400 – 2/4	50 / 13	8220 / 4230	1,50 / 0,37	2940 / 1460	4,80 / 1,4	30,5 / 7,00	67 / 51	102
AVJ-R 400 – 2	50	8220	1,50	2840	4,80	21,0	67	102

Typ Type	Ťah. sila Thrust N	Prietok Air flow m ³ /h	Výkon motora Motor power kW	n _{EM} min ⁻¹	Nom. prúd Nom. current A	Rozbeh. prúd Start current A	L _{pA} ** dB(A)	Hmot Weight kg
ODT AVJ-R 315 – 2/4	20 / 5	4190 / 2095	0,8 / 0,2	2820 / 1400	1,95 / 0,70	11,3 / 2,70	55 / 40	52
ODT AVJ-R 315 – 2	20	4190	0,75	2760	1,95	12,5	55	52
ODT AVJ-R 355 – 2/4	38 / 9	6360 / 3180	1,50 / 0,37	2875 / 1430	3,80 / 1,19	30,5 / 7,00	61 / 43	82
ODT AVJ-R 355 – 2	38	6360	1,50	2855	3,80	21,0	61	82
ODT AVJ-R 400 – 2/4	50 / 13	8220 / 3850	1,50 / 0,37	2875 / 1430	3,80 / 1,19	30,5 / 7,00	67 / 51	102
ODT AVJ-R 400 – 2	50	8220	1,50	2855	3,80	25,5	67	102

Teplotná trieda / Temperature class: **F200, F300, F400**

** - L_{pA} @ 3m, voľné pole

** - L_{pA} @ 3m, free field